



Driving Your Vision

A division of Endicott Research Group, Inc.

GEN36WUV900MA-D

Constant Current, 36W, 900mA,
Dimmable

2601 Wayne Street, Endicott, NY 13760 • www.ERGLighting.com • 1-800-215-5866



Description

Driver Type: Constant Current	Total Output Power: 36W
Input Voltage Range: 120~277Vac +/- 10%	Selectable Outputs: 1
Dimming: 0 - 10V	Warranty: 5 years
Certifications: UL8750; IP20 dry/damp	Protections: voltage; current; short circuit

Applications

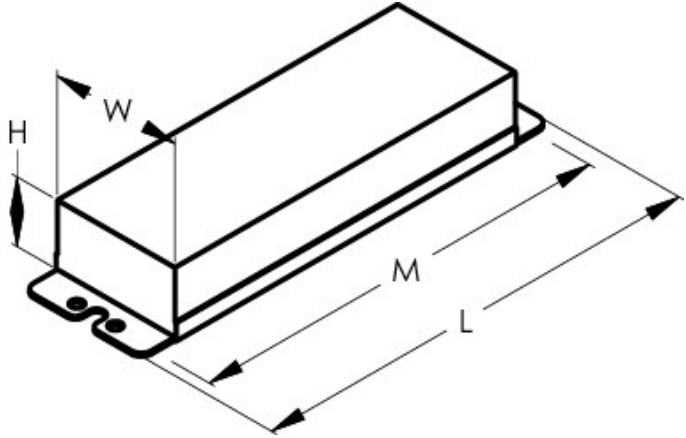
General Lighting • Downlight • Flush Mount • Troffer
Linear Fixture • Wall Pack

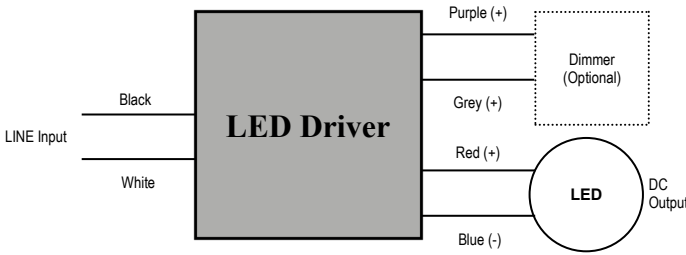
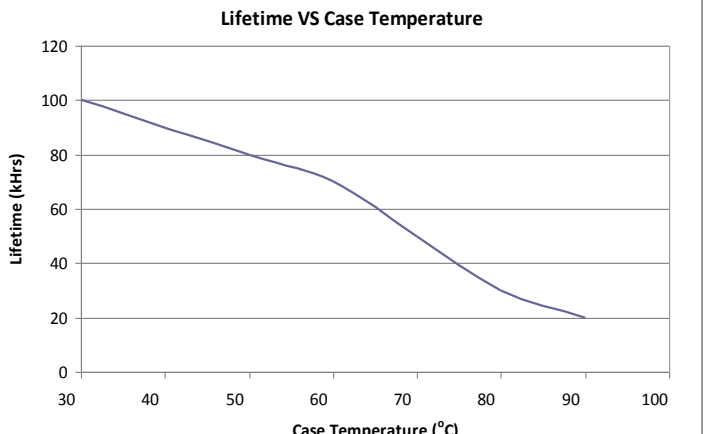
Performance Specifications

Model Number	Max Output Power	Output Current	Output Voltage	Efficiency	Remote Mounting Distance (#18AWG)	Class 2	
						US	Canada
GEN36WUV900MA-D	32.4W	900mA	18 - 36V	81%	42 ft.	✓	✓

ELECTRICAL SPECIFICATIONS:		ENVIRONMENTAL SPECIFICATIONS/ SAFETY AND EMC COMPLIANCE:	
Input Voltage Range:	120~277Vac ± 10%	Operating Temperature:	-30 to 60°C
Frequency:	50/60Hz	Storage Temperature:	-40 to 85°C
Power Factor:	>0.9 @full load	Humidity:	5% to 95%
Inrush Current:	20A @230V	MTBF:	384,000 hours at 40°C ambient (~70°C Case temp)
Max Input Current:	0.41A @120V	Maximum Case Temperature:	90°C
THD:	<20%	UL/cUL	UL 8750
Protection:	Over Voltage, Over Current, and Short Circuit	FCC, 47CFR Part 15	Class B Consumer Limit
Withstand Voltage:	I/P – O/P 2k Vac	EN61000-3-2	

PHYSICAL DIMENSIONS:	
Length (L):	6.46"
Width (W):	1.89"
Height (H):	1.15"
Mounting (M):	6.00"
Weight:	0.36 kg
WIRE SPECIFICATIONS:	
Input:	12", UL 1316 #18AWG (Black and White)
Output:	12", UL 1569 #18AWG (with Non-Class 2 output) 12", UL 1316/1430 #22AWG (with Class 2 output) (Red and Blue)
Dimming:	12"UL 1316/1430 #22AWG (Purple and Grey)



WIRING DIAGRAM	LIFETIME vs CASE TEMPERATURE:																
	 <table border="1"> <caption>Lifetime VS Case Temperature Data</caption> <thead> <tr> <th>Case Temperature (°C)</th> <th>Lifetime (kHrs)</th> </tr> </thead> <tbody> <tr><td>30</td><td>100</td></tr> <tr><td>40</td><td>90</td></tr> <tr><td>50</td><td>80</td></tr> <tr><td>60</td><td>70</td></tr> <tr><td>70</td><td>50</td></tr> <tr><td>80</td><td>30</td></tr> <tr><td>90</td><td>20</td></tr> </tbody> </table>	Case Temperature (°C)	Lifetime (kHrs)	30	100	40	90	50	80	60	70	70	50	80	30	90	20
Case Temperature (°C)	Lifetime (kHrs)																
30	100																
40	90																
50	80																
60	70																
70	50																
80	30																
90	20																